
# Conex Bänninger Delbraze

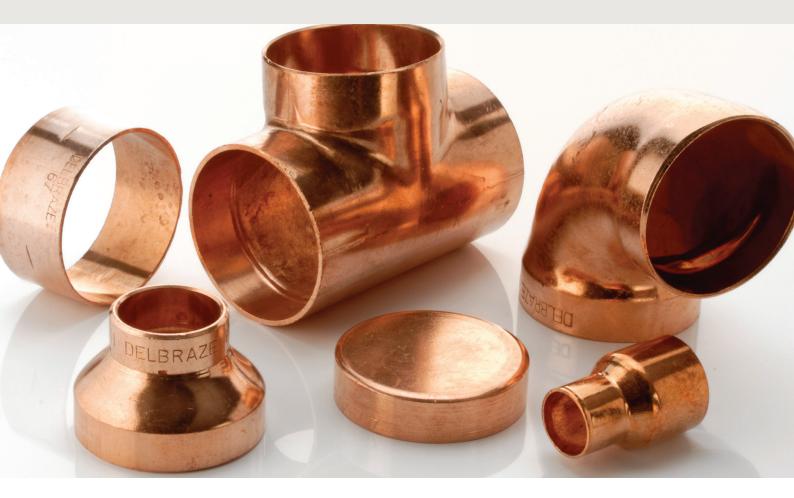

### A range of copper capillary brazing fittings

#### Features and Benefits:

- Available in sizes 66.7-159mm.
- Suitable for connecting copper tubes in accordance with EN1057.
- Manufactured with copper and gunmetal which are immune to dezincification.
- Fittings are designed for brazing applications only and are not suitable to be jointed using the soft soldering technique.
- Our range of accessories includes brazing rods to EN 1044, brazing flux and mats.

• Hydraulic working temperatures and pressures based on EN 1254-1:


| Size<br>(mm) | Working pressure (bar) |       |       |
|--------------|------------------------|-------|-------|
|              | -20°C to 110°C         | 150°C | 200°C |
| 66.7         | 15.4                   | 13.1  | 6.9   |
| 76.1         | 15.4                   | 13.1  | 6.9   |
| 108          | 14.2                   | 12.1  | 6.4   |
| 133          | 10.6                   | 7.7   | 4.1   |
| 159          | 11.8                   | 8.6   | 4.6   |





## Conex Bänninger

#### Delbraze Range

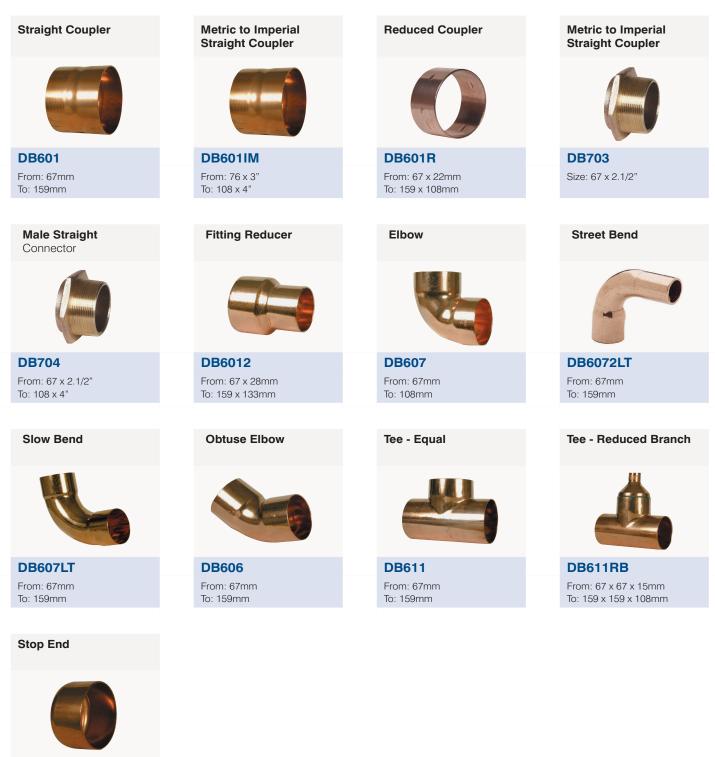

**DB617** From: 67mm To: 159mm



\*Conex|Bänninger products are approved by numerous Standards Authorities and Certification Bodies. For more details on this product range, please email our technical team at: technical@ibpgroup.com.

Conex Universal Limited: Global House, 95 Vantage Point, The Pensnett Estate, Kingswinford, West Midlands DY6 7FT, UNITED KINGDOM. Tel: +44 (0)121 557 2831 | Fax: +44 (0)121 557 0185 | Email: sales@ibpgroup.com | Website: www.conexbanninger.com This is a representation of the full range from Conex Universal. IBP trade marks are registered in numerous countries.

