Conex Bänninger



A range of Compression fittings.


Features and Benefits:

- Conex Compression fittings are compatible with EN1057 equivalent copper tube to EN1057.
- Conex Compression fittings are suitable for connecting polybutylene pipes (PB) and PEX to EN15876-2, EN15875-2 and BS57291:2 and 3.
- Fittings compatible with PB and PEX pipes are available in dimensions 10,15,18,22 and 28mm.
- Used in plumbing, heating, cooling, compressed air and gas applications.
- They are manufactured in duplex brass. Many items are also available in dezincification resistance (DZR) brass.

- Manufactures in accordance with EN 1252-2 and threaded connection to EN1254-4.
- Suitable for Flame Free installations.
- PTFE tape is not required for installation.
- Installation with PB and PEX pipe requires liners recommended by the tube manufacturer.
- Imperial tube sizes can be connected with special rings and adapters.



A range of Conex Compression fittings

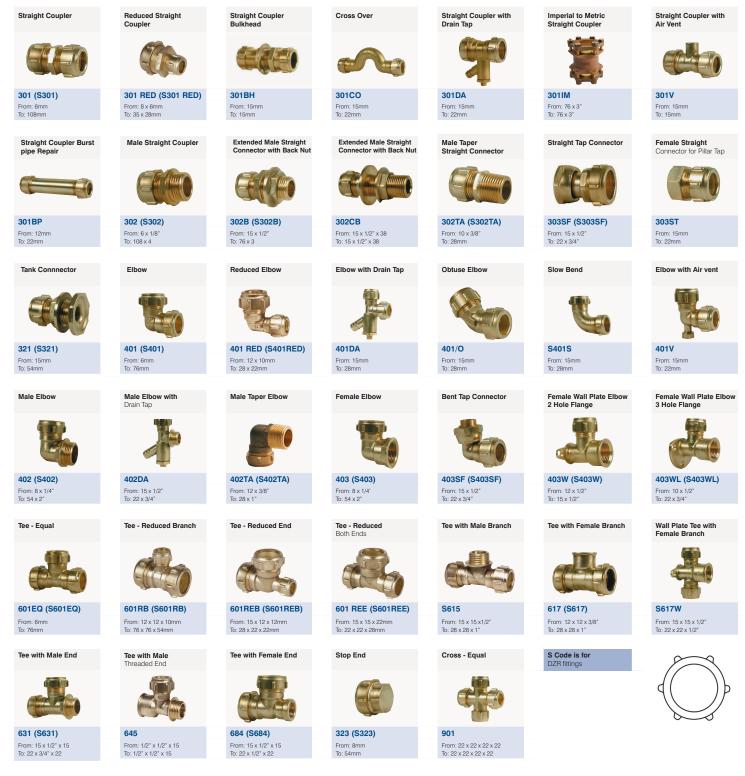



*Conex | Bänninger products are approved by numerous Standards Authorities and Certification Bodies. For more details on this product range, please email our technical team at: technical@ibpgroup.com.

Conex Universal Limited: Global House, 95 Vantage Point, The Pensnett Estate, Kingswinford, West Midlands DY6 7FT, UNITED KINGDOM. Tel: +44 (0)121 557 2831 | Fax: +44 (0)121 557 0185 | Email: sales@ibpgroup.com | Website: www.conexbanninger.com This is a representation of the full range from Conex Universal. IBP trade marks are registered in numerous countries.

