










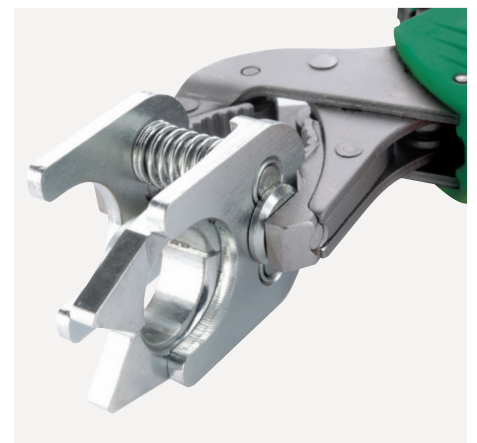













A Range of easy to use Conex Push-Fit fittings

Features and Benefits:

- Suitable for hot and cold drinking water, heating and chilled water systems.
- Dezincification resistant (DZR) body in natural brass finish.
- Only two internal components: High grade EPDM O-Ring and Stainless Steel grab ring.
- Precision machined body with inbuilt tube stabiliser.
- Connects multiple tubes: copper, carbon steel, stainless steel, PB, PE-X.
- Professional tool for demounting, fittings can then be reused.
- Unique grab ring ensures the fitting is firmly orientated but not fixed, allowing turning for system alignment.
- Patented design.
- Maintains electrical continuity on metallic pipe systems.
- Stylish slim-line design for tight corners and exposed pipework.
- Fast and easy to install.
- Available in sizes 10, 12, 15, 18, 22 and 28mm.
- Flame free installation.
- One fitting for many tubes reduces toolbox weight and inventory costs.
- Conforms to normal operating parameters for metallic tubes: maximum working pressure of 16 bar at 30°C and 6 bar 95°C.
- Fitting can be recycled at end of life.
- 25 years guarantee.



Push-Fit Range

Straight Connector  270 From: 10mm To: 28mm	Reduced Connector  240 From: 15 x 10mm To: 22 x 15mm	Fitting Reducer  243 From: 15 x 10mm To: 28 x 22mm	Elbow  090 From: 10mm To: 28mm	Street Elbow  001 From: 15mm To: 28mm	Straight Female Connector  270G From: 15 x 1/2" To: 28 x 1"
Straight Male Connector  243G From: 15 x 1/2" To: 28 x 1"	Straight Tap Connector  240G From: 15 x 1/2" To: 22 x 3/4"	Bent Tap Connector  002G Size: 15 x 1/2"	Wall Plate Elbow  472G Size: 15 x 1/2"	Tank Connector  350 From: 15 x 1/2" To: 28 x 1"	Equal Tee  130EQ From: 10mm To: 28mm
Reduced Branch Tee  130RB From: 22 x 22 x 15mm To: 28 x 28 x 22mm	Reduced End Tee  130RE Size: 15 x 10 x 15mm To: 28 x 22 x 28mm	Reduced End & Branch Tee  130REB Size: 22 x 15 x 15mm To: 28 x 22 x 22mm	Female Branch Tee Parallel Thread  130G Size: 15 x 15 x 1/2"	Stop End  301 From: 10mm To: 28mm	Release Tool & Head Pack  CP-FSET002 Size: 10, 15, 22 & 28mm head units & case
Tool Heads  CP-F Head From: 10mm To: 28mm	Internal Liners (for plastic pipes)  PP From: 10mm To: 28mm				



*Conex|Bänninger products are approved by numerous Standards Authorities and Certification Bodies. For more details on this product range, please email our technical team at: technical@ibpgroup.com.

Conex Universal Limited: Global House, 95 Vantage Point, The Pensnett Estate, Kingswinford, West Midlands DY6 7FT, UNITED KINGDOM.
 Tel: +44 (0)121 557 2831 | Fax: +44 (0)121 557 0185 | Email: sales@ibpgroup.com | Website: www.conexbanninger.com

This is a representation of the full range from Conex Universal. IBP trade marks are registered in numerous countries.

 an IBP GROUP company